




KEYPOWER LOAD BANK:

- * Frequency: 50/60 Hz;
- * Voltage range: AC 110-690V;
- * Duty: Continuous;
- * Cooling system: Industrial grade axle fans;
- * Discharged air direction: horizontal for 100 kw, vertical for larger models;
- * Control power phase: Single-phase, two-wire for 500 kw and below; three-phase, four-wire for larger models.

GENERAL SPECIFICATIONS

| | | |
|--|-----------------------------|--|
| | Model | KPLB-1375 |
| | Capacity | 1375KVA/1100kW |
| | Type of load | Resistive & inductive load |
| | Power factor | 0.8/1.0 |
| | Duty cycle | Continuous |
| | Cooling system | Industrial grade axial fan |
| | Cooling mode | Forced air-cooled |
| | Airflow | Vertical discharge |
| | Phase | Available at both single and three phase |
| | Rated testing voltage | 3P3W 110 - 690V |
| | Rated frequency | 50Hz / 60Hz |
| | Number of fans | 6 |
| | Control power input voltage | 3P4W 220 - 480V |

Dimension and Weight

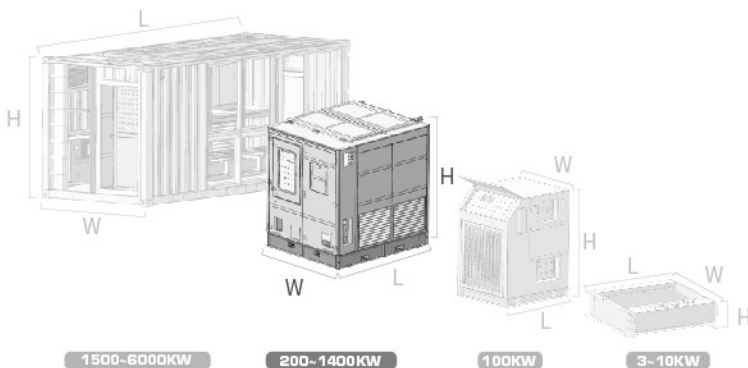

DIMENSION **KPLB-1100**

| | | | |
|--|------------|----|------|
| | Length (L) | mm | 3500 |
| | Width (W) | mm | 2270 |
| | Height (H) | mm | 2150 |
| | Weight | kg | 5600 |

KEYPOWER has the right to modify any feature without prior notice. Weights and dimensions based on standard products. Illustrations may include optional equipment. Technical data described in this catalogue correspond to the available information at the moment of printing. The illustrations and images are indicative and may not coincide in their entirety with the product. Industrial design under patent.

Technical Specifications

| PERFORMANCE PARAMETER | |
|------------------------------------|---|
| Ambient Temperature | -10°C ~ +55°C |
| Relative Humidity | ≤98% ventilated environment without explosive or corrosive dust |
| Altitude | ≤3000m above sea level |
| Wire Connection | Socket / Terminal |
| Load Tolerance (each step) | ±5% |
| Load Tolerance (overall) | ±3% |
| Enclosure | Canopy type |
| Parameter measuring accuracy grade | 0.5 |
| Noise level | 83 dBA @ 1m |
| Enclosure protection class | IP 23 |
| Forklift handling | Yes |

| CONTROL PANEL | |
|--------------------------|--|
| Control mode (Standard) | Local control |
| Control mode (Optional) | Remote control |
| Remote control distance | ≤100 m |
| Load step | 0-10kW*1, 10kW*3, 20kW*3, 50kW*2, 100kW*9 / 0-8kvar*1, 8kvar*3, 15kvar*3, 38kvar*2, 75kvar*9 (non-intelligent type) 0-10kW*1, 10kW*3, 20kW*3, 50kW*6, 100kW*7 / 0-8kvar*1, 8kvar*3, 15kvar*3, 38kvar*6, 75kvar*7 (intelligent type) |
| Load bank protections | Fan failure alarm / Overload alarm / Overvoltage alarm / Overheating alarm |
| Multi functions display | voltage, current, load power, reactive power, apparent power, power factor, frequency etc. |
| One-step load/unload | Yes |
| Emergency stop | Yes |
| Phase sequence indicator | Yes |

Optional Items for Load Bank:



- Capacitive/Inductive/Resistive load bank with different power factor
- Intelligent control
- Laptop for remote control
- Generator tester
- Multi-voltage
- Water-proof cover for air outlet (200-1400KW)
- Air deflecting duct for containerized load bank
- Space heater
- Cable connector
- Galvanized sheet canopy
- Wheels for < 500KW load bank
- Trailer

| RESISTOR FEATURES | | 304 STAINLESS STEEL RESISTORS |
|------------------------|------------------------------|-------------------------------|
| Material | Stainless steel | |
| Cooling mode | Forced air cooling | |
| Temperature resistance | 500 ~ 600°C | |
| Load Tolerance | ±5% | |
| Warranty | 3 years with unlimited hours | |

| INDUCTOR FEATURES | | INDUCTIVE TYPE |
|------------------------|-----------------------------|----------------|
| Insulation level | Class H | |
| Operating temperature | -25 ~ 60°C | |
| Flame retardant rating | UL94 - V0 | |
| Surface treatment | Conformal coating | |
| Fastener treatment | Hot-dip galvanized | |
| Overall treatment | Vacuum impregnation varnish | |

Generator Tester Function


GENERATOR TESTER




TEST REPORT

| Test report of generator set's steady performance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--------------------------|--------------------------|--------------------------|-------------------------|--------------------------|-------------------------|--------------------------|-------------------------|--------------------------|------|------|-------|------|-------|------|-------|------|-------|------|----------------------------------|--------------------------|-------------------------|--------------------------|-------------------------|--------------------------|-------------------------|--------------------------|-------------------------|--------------------------|-----------------------|------|---------------|-------|-------------|--------|---------------|------|---------------|-------|----------------|-----|----------------|-----|----------------|-----|----------------|-----|----------------|-----|
| Source: 020202020 | | Date of test: 2012-11-10 | | Test time: 09:30:30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <tr> <th>Item</th> <th>Unit</th> <th>Value</th> <th>Unit</th> <th>Value</th> <th>Unit</th> <th>Value</th> <th>Unit</th> <th>Value</th> <th>Unit</th> </tr> <tr> <td>1. Set type</td> <td>1</td> <td>1000A</td> <td>Set type</td> <td>1000A</td> <td>Set type</td> <td>1000A</td> <td>Set type</td> <td>1000A</td> <td>Set type</td> </tr> <tr> <td>Rated frequency</td> <td>50Hz</td> <td>Rated current</td> <td>1000A</td> <td>Rated power</td> <td>1000kW</td> <td>Rated voltage</td> <td>400V</td> <td>Rated current</td> <td>1000A</td> </tr> <tr> <td>Generator type</td> <td>AVR</td> <td>Generator type</td> <td>AVR</td> <td>Generator type</td> <td>AVR</td> <td>Generator type</td> <td>AVR</td> <td>Generator type</td> <td>AVR</td> </tr> </table> | | | | | | | | | | Item | Unit | Value | Unit | Value | Unit | Value | Unit | Value | Unit | 1. Set type | 1 | 1000A | Set type | 1000A | Set type | 1000A | Set type | 1000A | Set type | Rated frequency | 50Hz | Rated current | 1000A | Rated power | 1000kW | Rated voltage | 400V | Rated current | 1000A | Generator type | AVR | Generator type | AVR | Generator type | AVR | Generator type | AVR | Generator type | AVR |
| Item | Unit | Value | Unit | Value | Unit | Value | Unit | Value | Unit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. Set type | 1 | 1000A | Set type | 1000A | Set type | 1000A | Set type | 1000A | Set type | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated frequency | 50Hz | Rated current | 1000A | Rated power | 1000kW | Rated voltage | 400V | Rated current | 1000A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Generator type | AVR | Generator type | AVR | Generator type | AVR | Generator type | AVR | Generator type | AVR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <tr> <th>Item</th> <th>Unit</th> <th>Value</th> <th>Unit</th> <th>Value</th> <th>Unit</th> <th>Value</th> <th>Unit</th> <th>Value</th> <th>Unit</th> </tr> <tr> <td>2. Test of insulation resistance</td> <td>between phase and ground</td> <td>between phase and phase</td> <td>between phase and ground</td> <td>between phase and phase</td> <td>between phase and ground</td> <td>between phase and phase</td> <td>between phase and ground</td> <td>between phase and phase</td> <td>between phase and ground</td> </tr> <tr> <td>Insulation resistance</td> <td>MΩ</td> <td>500</td> <td>MΩ</td> <td>500</td> <td>MΩ</td> <td>500</td> <td>MΩ</td> <td>500</td> <td>MΩ</td> </tr> </table> | | | | | | | | | | Item | Unit | Value | Unit | Value | Unit | Value | Unit | Value | Unit | 2. Test of insulation resistance | between phase and ground | between phase and phase | between phase and ground | between phase and phase | between phase and ground | between phase and phase | between phase and ground | between phase and phase | between phase and ground | Insulation resistance | MΩ | 500 | MΩ | 500 | MΩ | 500 | MΩ | 500 | MΩ | | | | | | | | | | |
| Item | Unit | Value | Unit | Value | Unit | Value | Unit | Value | Unit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. Test of insulation resistance | between phase and ground | between phase and phase | between phase and ground | between phase and phase | between phase and ground | between phase and phase | between phase and ground | between phase and phase | between phase and ground | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Insulation resistance | MΩ | 500 | MΩ | 500 | MΩ | 500 | MΩ | 500 | MΩ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <tr> <th>Item</th> <th>Unit</th> <th>Value</th> <th>Unit</th> <th>Value</th> <th>Unit</th> <th>Value</th> <th>Unit</th> <th>Value</th> <th>Unit</th> </tr> <tr> <td>3. Load test</td> <td>Power (kW)</td> <td>1000</td> <td>Power (kVA)</td> <td>1000</td> <td>Power (kVA)</td> <td>1000</td> <td>Power (kVA)</td> <td>1000</td> <td>Power (kVA)</td> </tr> <tr> <td>Load</td> <td>100%</td> <td>1000</td> <td>Load</td> <td>100%</td> <td>1000</td> <td>Load</td> <td>100%</td> <td>1000</td> <td>Load</td> </tr> </table> | | | | | | | | | | Item | Unit | Value | Unit | Value | Unit | Value | Unit | Value | Unit | 3. Load test | Power (kW) | 1000 | Power (kVA) | 1000 | Power (kVA) | 1000 | Power (kVA) | 1000 | Power (kVA) | Load | 100% | 1000 | Load | 100% | 1000 | Load | 100% | 1000 | Load | | | | | | | | | | |
| Item | Unit | Value | Unit | Value | Unit | Value | Unit | Value | Unit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3. Load test | Power (kW) | 1000 | Power (kVA) | 1000 | Power (kVA) | 1000 | Power (kVA) | 1000 | Power (kVA) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Load | 100% | 1000 | Load | 100% | 1000 | Load | 100% | 1000 | Load | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

FREQUENCY AND VOLTAGE CURVES

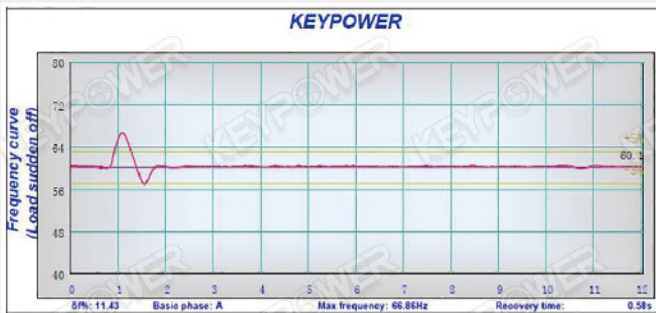


HARMONIC CURVE

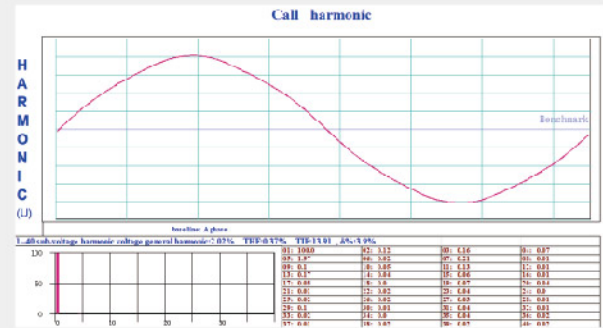

This generator tester can measure most electric parameters of a single-phase or three-phase AC generator. The standards it complied with are GB/T 2820-1997 and GB 2820-90. The signal frequency can be measured varies from 45 Hz to 65Hz. You can select one wiring mode from four modes – 1Φ2W, 3Φ3W, 3Φ4W and 3V3A. The following table shows the parameters: It's the best way to replicate, prove and verify the real-life demands on critical power systems.

| MEASUREMENT MODE | PARAMETERS |
|------------------|--|
| Normal | Voltage, Current, Active Power, Reactive Power, Apparent Power, Power Factor, Frequency, Energy runtime, Imbalance degree of Voltage |
| Harmonic | Voltage & Current: 2~50th order and the THD (Total harmonic distortion) |
| Adjustment | In 100 seconds: Records the maximum & minimum value of Voltage & Frequency. Calculates the increase & decrease range of Voltage & Frequency and the percentage of adjustment. |
| Fluctuation | In 60 seconds: Records the maximum & minimum value of Voltage & Frequency. Calculates the NORMAL frequency rang, NORMAL voltage offset, voltage modulation, percentage of fluctuation and frequency. |
| Load | In 12 seconds: Records the minimum value of Voltage & Frequency. Records the maximum value of Current and the recovery time. Calculates the offset of Voltage & Frequency. |
| Unload | In 12 seconds: Records the maximum value of Voltage & Frequency. Record the minimum value of Current and the recovery time. Calculates the offset of Voltage & Frequency. |
| Wave Record | Records the real-time voltage waves by five optional modes. The recording time is between 5 seconds and 5 minutes by different modes. |

Control Panel

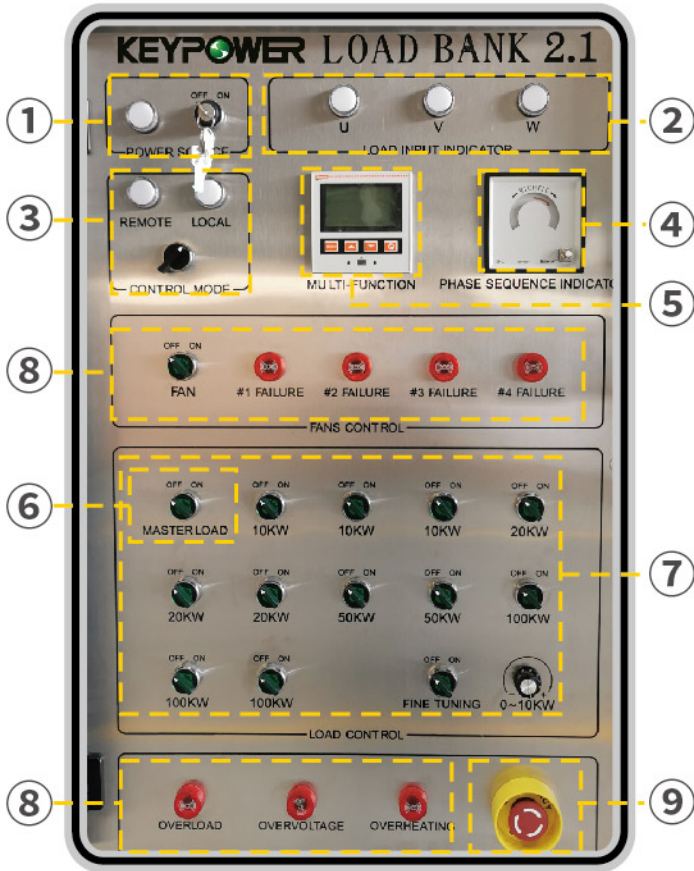


| MANUAL CONTROL | FUNCTION |
|------------------------------|--|
| ① Turn on / off power source | Tested power source input |
| ② Load input indicator | Indicate U V W load input normal or not |
| ③ Control mode selection | Choose control mode: Local manual control / Touch screen control / Remote control |
| ④ Phase sequence indicator | Indicate phase sequence of tested power right or not |
| ⑤ Multi-function meter | Show testing parameters |
| ⑥ Master load on / off | One step loading / unloading |
| ⑦ Load Steps | Loading / unloading |
| ⑧ Alarm | Load bank protection: Fan failure alarm / Overload alarm / Overvoltage alarm / Overheating alarm |
| ⑨ Emergency stop button | Emergency stop |

In addition to all manual control functions, Intelligent/remote control also contains the following functions:

- Touch screen control/remote control
- Auto loading/unloading test
- Data setting

Intelligent control system with Mitsubishi® PLC

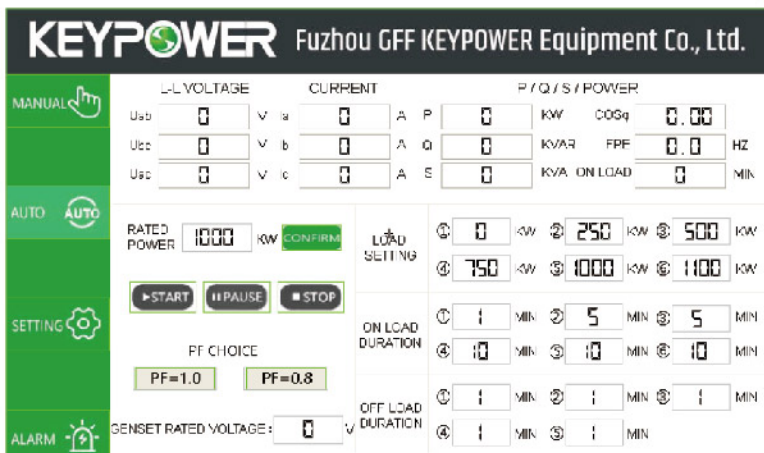

Intelligent Control Interface